



TRADE FIXTURES
NEWLEAF DESIGNS

www.tradefixtures.com



Setting the Flow Control

Tools Needed: We recommend using a flat-blade screwdriver with a narrow head, or a paint can lid opener.

(The tools are used in a NON-FOOD zone!)

Each Trade Fixtures Gravity Feed bin is equipped with a 6-setting flow control. It is designed to limit or enlarge the amount of product dispensed when the handle is pulled. **This control is up to you to set.** When the bin is shipped the setting is for the largest amount to be dispensed.

Decreasing the Food Flow or Door Opening

This is easily done. You have two options to accomplish this.

Option 1: (When the bin has product in it.) Take your tool and put it through the hole directly in front of the door travel stop, in the front of the bin, and then simply push against it 'clicking' it back until desired setting is achieved. See Fig. 1. (Each click will close the door opening more and more, until you just get a trickle of product.)





Option 2: (When the bin is empty.) Remove the the entire false front, and use your tool or fingers, to push the door travel stop. This works just like Option 1, but with much easier access to the door travel stop. See Fig. 1.

Increasing Food Flow or Door Opening

This is also an easy task. There are two options to accomplish this, as well. **We recommend using Option 1** (while the bin is empty). It has fewer steps, and is more easily accomplished.

Option 1: (When the bin is empty.) Remove the the entire false front, and use your tool, to release the tab on the bottom portion of the door travel stop. See Fig. 2. Once released pull the door travel stop back towards the front of the bin. (The farther you pull the door travel stop out will determine how much product will dispense when the handle is pulled.)

Option 2: (When the bin has product in it.) This requires the use of both hands and a couple fingers. With one hand, place a bag under the spout to catch the product that will be dispensed using this method. Then, insert the tool into the hole directly in front of the door travel stop, in the front of the bin. Push down on the tab to release it from the track. See Fig. 3. While the tab is released, take your fingers and pull down on the dispensing handle, which will grab ahold of the door travel stop and move it towards the front of the bin. See Fig. 4. (Let it come all of the way to the end.) Remove the bag of product, and adjust the door travel stop to your desired setting, by following the first set of instructions...see above.

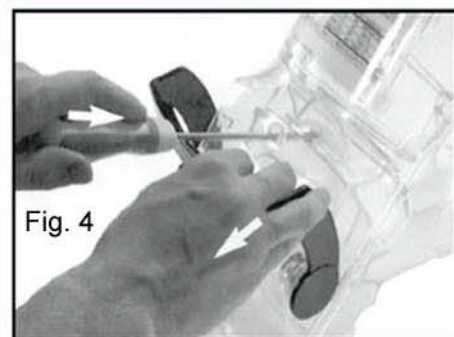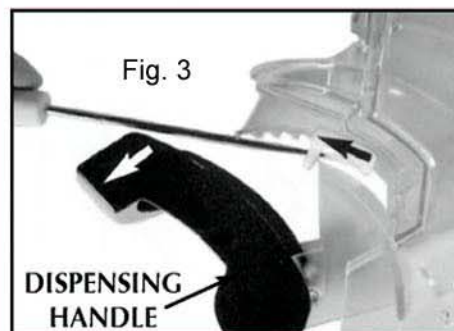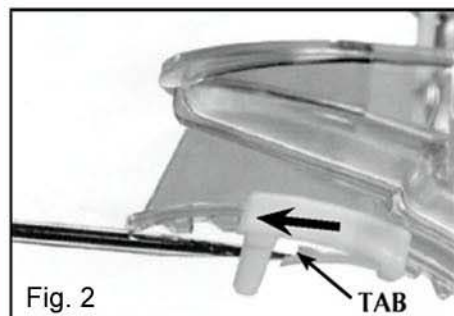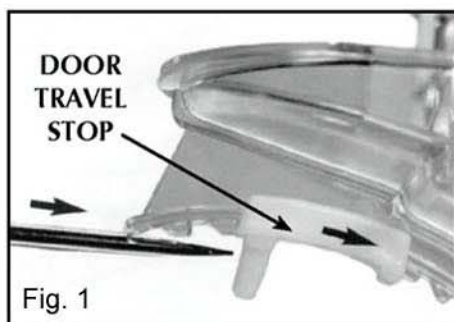

For more information or questions please contact us.
Phone: (800) 872-3490 or (501) 664-1318
Fax: (501) 664-9253

Trade Fixtures/Newleaf Designs
1501 Westpark Dr., Suite 5
Little Rock, AR 72204